



IMAGENEX MODEL 881L DIGITAL MULTI-FREQUENCY PROFILING SONAR

APPLICATIONS:

- Profiling
- ROV, AUV & UUV
- Offshore Oil & Gas
- Surveying
- Dam Face Inspection
- Pipeline Inspection
- Underwater Archaeology
- Scientific Research

FEATURES:

- **Ethernet**
- Programmable
- Multi-frequency
- High performance
- Lower cost
- Low power
- Simple set-up and installation
- Digital telemetry
- Full scale range from 1 m to 100 m
- Compact size
- Communication format available to user

Using Ethernet communications, this all-in-one, high performance digital profiling sonar can exceed 100 shots per second on the 1 m range at a 2 mm range resolution.

The 881L is a multi-frequency system that can operate with customized


configurations or revert to default settings to match appropriate operating range scales.

In addition to the benefits of low power, a simple set-up and installation procedure make this powerful sonar an ideal tool for remotely operated platforms ranging from large work ROV's to small inspection vehicles, as well as AUV and UUV applications.



HARDWARE SPECIFICATIONS:	
FREQUENCY	675 kHz -Other frequencies can be selected through programmable software configurations (Tunable from 600 kHz to 1 MHz in 5 kHz steps)
TRANSDUCER	Profiling type, fluid compensated
TRANSDUCER BEAM WIDTH	600 kHz: 2.4° 675 kHz: 2.1° 1 MHz: 1.4°
RANGE RESOLUTION	1 m – 4 m: 2 mm (0.08") 5 m & up: 10 mm (0.4")
MIN. DETECTABLE RANGE	150 mm (6")
MAX. OPERATING DEPTH	1000 m and 3000m available
MAX. CABLE LENGTH	Standard: 100 m on CAT5e Cable length may be increased up to ~9000 m using an Ethernet extender. Please enquire for more information.
INTERFACE	Standard: 10 Mbps Ethernet (10 BASE-T) using TCP/IP Bit rate may vary if an Ethernet extender is in use.
CONNECTOR	Side mounted, eight conductor, wet mateable (Subconn MCBH8M-AS or MCBH8M-Ti) Optional right angle or end mount connector
POWER SUPPLY	20 – 32 VDC at less than 5 Watts
DIMENSIONS (for both depth ratings)	79.4 mm (3.125") diameter x 234mm (9.2") length
WEIGHT: In Air	1000 m unit: 1.8 kg (4 lbs) 3000 m unit: 2.2 kg (4.8 lbs)
In Water	1000 m unit: 0.6 kg (1.3 lbs) 3000 m unit: 1 kg (2.2 lbs)
MATERIALS	1000 m unit: 6061-T6 Aluminum & Polyurethane 3000 m unit: Titanium & Polyurethane
FINISH	Hard Anodize

SOFTWARE SPECIFICATIONS:	Win881L.exe, Win881AL.exe
WINDOWS™ OPERATING SYSTEM	Windows™ XP, Vista, 7, 8, 10
MODES	Side Scan, Polar, and Sector
RANGE SCALES	1 m, 2 m, 3 m, 4 m, 5 m, 10 m, 20 m, 30 m, 40 m, 50 m, 60 m, 80 m, 100 m
TRAIN ANGLES	Continuous rotation, 3° increments
SECTOR SIZE: SECTOR MODE POLAR MODE	0° – 180°, 3° increments 0° – 357°, 3° increments, or Continuous rotation
STEP SIZES	Slow (0.3°), Medium (0.6°), Fast (0.9°), Faster (1.2°), Fastest (2.4°)
GRID TYPES	Polar and rectangular
FILE FORMAT	(filename).81L
RECOMMENDED MINIMUM COMPUTER REQUIREMENTS:	100 MHz Pentium 16 MB RAM 1 GB Hard Disk 800 x 600 x 256 colour graphics

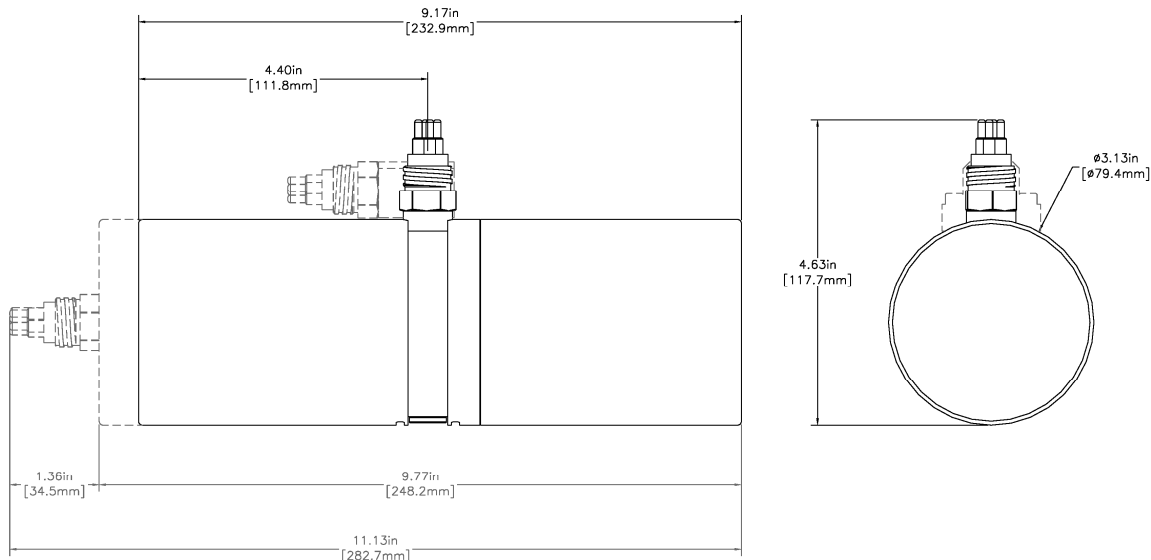

ORDERING INFORMATION:		
1000 m UNIT	Standard	881-000-520
3000 m UNIT	Standard	881-000-521
End mount connector	Option	-009
Right angle connector	Option	-010
IP Address*	Option	-020

*Note: Standard IP Address is 192.168.0.5
A different IP Address may be specified upon ordering.

Product and company names listed are trademarks or trade names of their respective companies.